



**MASONS**  
Designed Smart, Built Tough.


# Easy-Form

Adhesive Expansion Joint Filler



**Easy To Install, Self-Wound and Paperless – No Mess!**

Simply position foam at the starting point, commence unrolling and apply pressure to ensure adhesion.

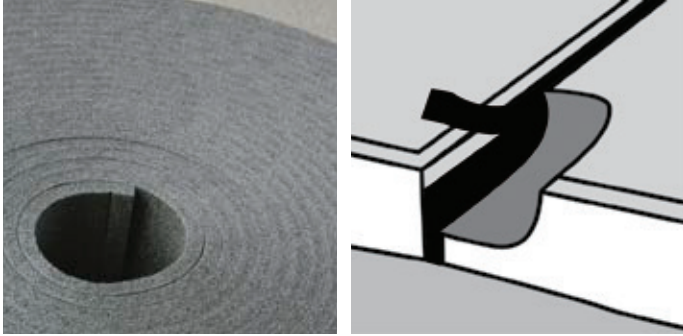

## Benefits

- Cost savings: in material, time and the overall project
- Reduced labour time due to the ease of installation
- No mess to attend to! ("Paperless")
- Easy to store
- Easy to transport
- No release liner

## Features

### Continuous Rolls

A unique one piece extruded foam with no laminations or joins

### Closed Cell

Non absorbent and impervious to most liquids

### Crosslinked

Superior compression and recovery properties vital to ensure a good joint filler

## Size Availability

Easy-Form is available in:

**Roll Lengths:** 10m and 25m rolls

**Thickness:** 10mm

**Widths:** 50mm, 75mm, 100mm, 125mm, 150mm, 200mm, 250mm and 300mm

## Performance Data

Property	Typical Value	Test Method
Density	25 kg/m <sup>3</sup> (nominal)	Internal
Tensile Strength	3.3 kg/cm <sup>2</sup> MD, 1.8kg/cm <sup>2</sup> CD	JIS K6767
Elongation	240% MD, 140% CD	JIS K6767
Tear Strength	2.0 kg/cm MD, 1.3 kg/cm CD	JIS K6767
Hot Sealant Penetration	Zero	RTA T1154
Compression Strength	0.85 kg/cm <sup>2</sup> @ 50% deflection	Internal
Extrusion During Compression	1.3 mm	ASTM D545
Recovery After Compression	100% after 10 minutes	ASTM D545
Water Absorption	0.09 mg/cm <sup>2</sup>	JIS K6767
Water Vapour Permeability	8.2 x 10 <sup>-14</sup> kg/m/s/Pa	JIS Z0208

This information on Sekisui Foam Australia foams is presented to the best of our knowledge. All product data is based on average values and is for guidance only. As these products are subject to constant research and development, we reserve the right to update the contents without notice.

Recommendations as to methods of post fabrication, application and use of Sekisui Foam Australia foams are based on our experience and knowledge of the characteristics of our products and are given in good faith. As producer of the material we have no control over the application of Sekisui Foam Australia foams and no legal responsibility is accepted for such recommendations. In particular, no responsibility is accepted by us for any system in which Sekisui Foam Australia foams are utilised or for any application.

Softlon and Thermobreak – Registered trademarks of Sekisui Chemical Co. or its subsidiaries.

© Sekisui Foam Australia Pty Ltd. Date of Publication: February 2015.

Masons Easy-Form	Masons Code
Masons Foam Easy-Form 50MMX25M	FMEF10X50X25
Masons Foam Easy-Form 75MMX25M	FMEF10X75X25
Masons Foam Easy-Form 100MMX25M	EFMEF10X100X25
Masons Foam Easy-Form 125MMX25M	FMEF10X125X25
Masons Foam Easy-Form 150MMX25M	FMEF10X150X25
Masons Foam Easy-Form 200MMX25M	FMEF10X200X25
Masons Foam Easy-Form 250MMX25M	FMEF10X250X25
Masons Foam Easy-Form 300MMX25M	FMEF10X300X25