



UNI FAB[®] Seam & Repair Tape

60mm x 25m • Better Coverage • Improved Adhesion

Masons UNI FAB Seam & Repair Tape is a soft and very pliant specialty adhesive tape with an extremely tacky polyacrylic pressure-sensitive adhesive – especially at very cold temperatures. It also features very good heat and ageing resistance.


Use to seal laps and joins in **Masons UNI/UNI FR** and other underlays where a lap seal is required.

This tape also bonds strongly to wood, non-sanding bricks and clean concrete surfaces which are free of adhesion-repellant substances.

Is also used to repair damage to building wraps and underlays and to seal head and apron flashings to **UNI /UNI FR**. See **UNI FR** Installation Instructions on our website.

Special Notes

- The filament layer in the tape is for protection from over expansion
- Temperature stable until 120 °C
- Very pliant even at 0 °C
- UV resistant for 6 months plus
- Extremely high initial and permanent adhesion and good adhesion in low temperatures
- Permanent high moisture resistance
- Especially low-emission, EC1
- Available as white/black

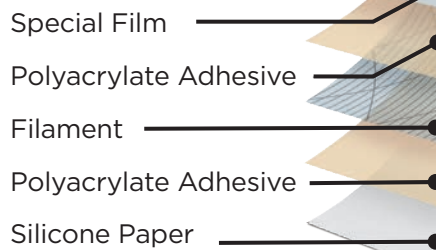

Available in white/black



Application Notes

- Application temperature: +5 °C to +40 °C; surface/material -10 °C to +40 °C
 - Observe minimum overlaps of 75mm on a horizontal join and 150mm on a vertical join when seaming **UNI** or **UNI FR**
 - Bonded surfaces should be dry and free of any dirt and grease
 - Do not deliberately stretch or over tension seam tape when applying to **UNI**, **UNI FR** or wrap.
 - Use a tape applicator or **plastic scraper** to **firmly** smooth the tape onto the wrap
- NOTE:** Hand pressure alone will not activate the adhesive
- Store in dry rooms from +5 °C to +25 °C, protected from UV radiation

Product	Roll Size	Masons Code	Roll per carton
UNI FAB Seam & Repair Tape	60MM X 25M	UNISEAMTPE60MM	10